

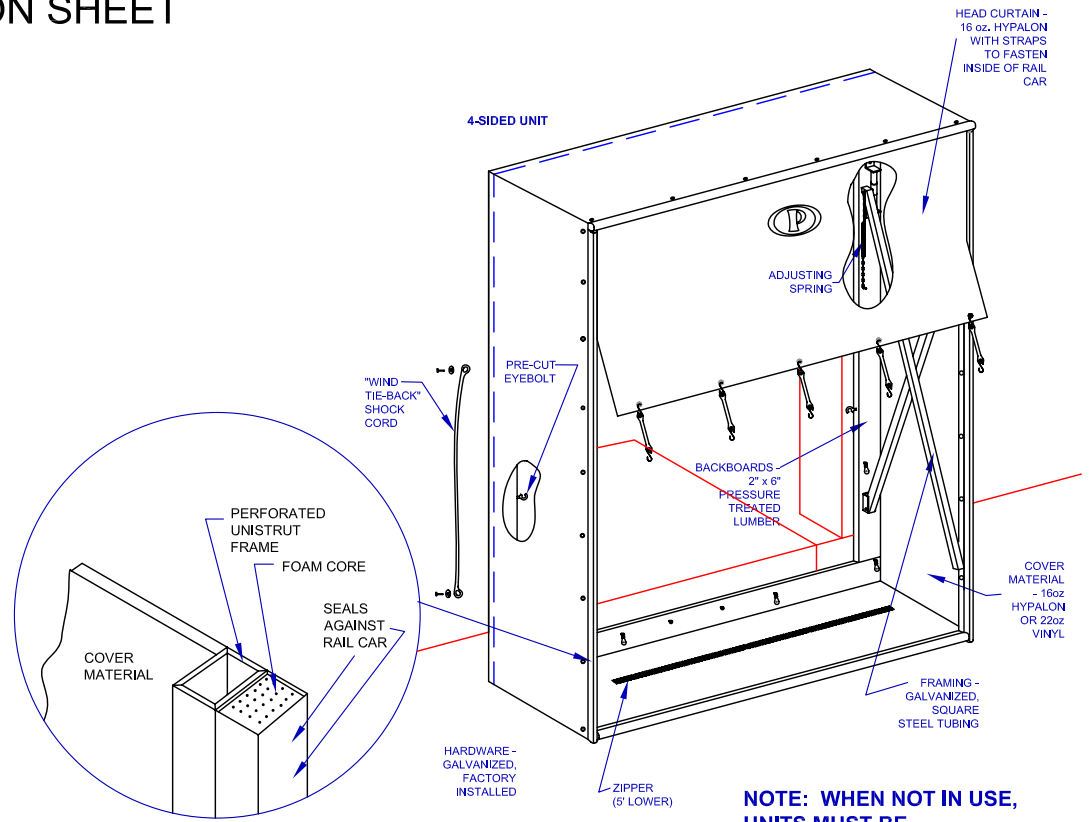


4-SIDED RAIL DOCK SHELTER SPECIFICATION SHEET

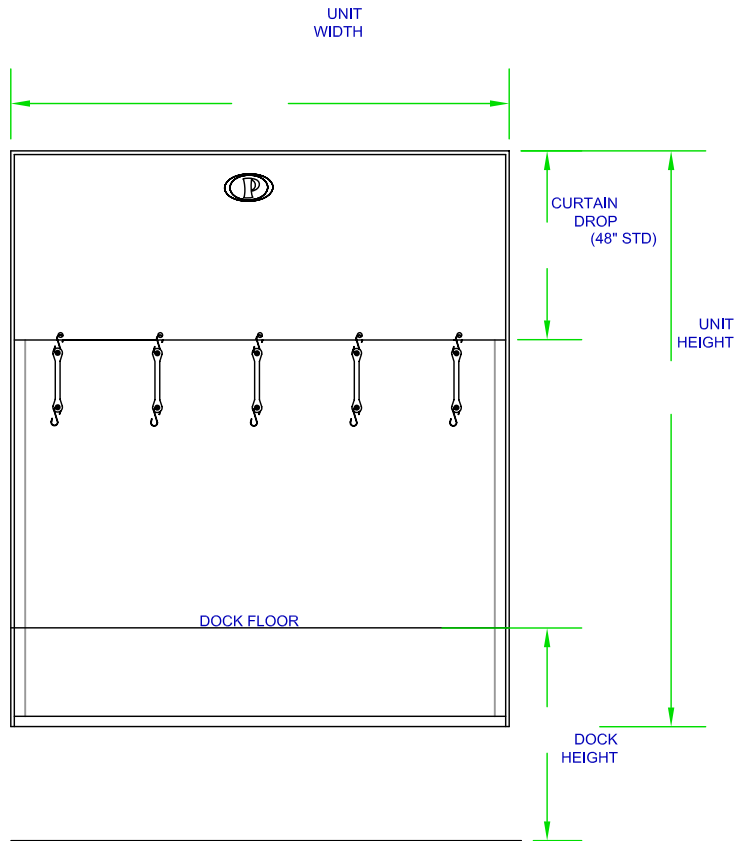

NOTE: WHEN NOT IN USE, UNITS MUST BE RETRACTED.

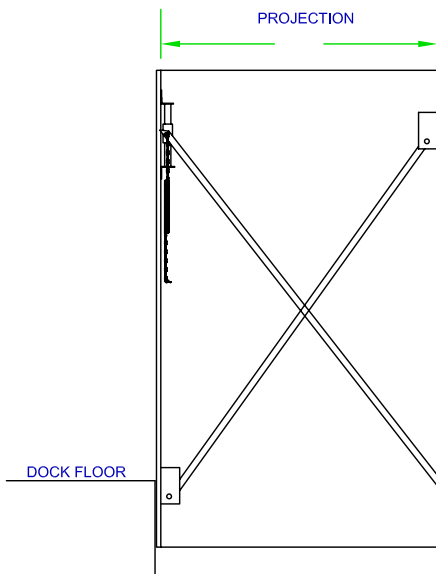

QUANTITY: _____, MODEL: _____.
 UNIT WIDTH: _____, HEIGHT: _____.
 PROJECTION: _____.
 HEAD CURTAIN OFF RAIL: _____.
 (Standard 11'-0" off rail)
 UNIT TO EXTEND BELOW DOCK: _____.
NOTE: 4-sided Unit **must** extend a minimum of 12" below dock. It is also recommended, but not mandatory, to extend 3-sided unit 12" below dock to reduce bottom draft.

DOOR SIZE: _____ WIDTH, _____ HEIGHT
 DOCK HEIGHT: _____, BUMPER PROJECTION: _____.
 DISTANCE FROM WALL TO - CENTERLINE OF TRACKS: _____.
 INSIDE OF NEAR RAIL: _____.
 LEDGE or PLATFORM PRESENT: YES NO
 IF SO, DESCRIBE: _____ W x _____ H x _____ PROJECTION

SPECIAL INFORMATION


PERMA TECH, INC.
 363 HAMBURG STREET • BUFFALO, NY 14204
 (716) 854-0707 • 1-800-DOC-SEAL
www.permatechinc.com

JOB: _____
 DEALER: _____
 CONTACT: _____ QUOTE #: _____
 APPROVED BY SIGNATURE: _____