

DOUBLE ACTING "FLEXIBLE" TRAFFIC DOOR





Perma Tech, Inc.

363 Hamburg Street, Buffalo, NY 14204

Tel: 716-854-0707

Fax: 716-854-0774

Sales@PermaTechInc.com www.PermaTechInc.com

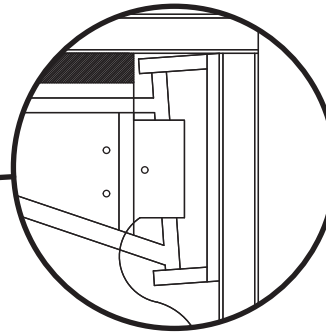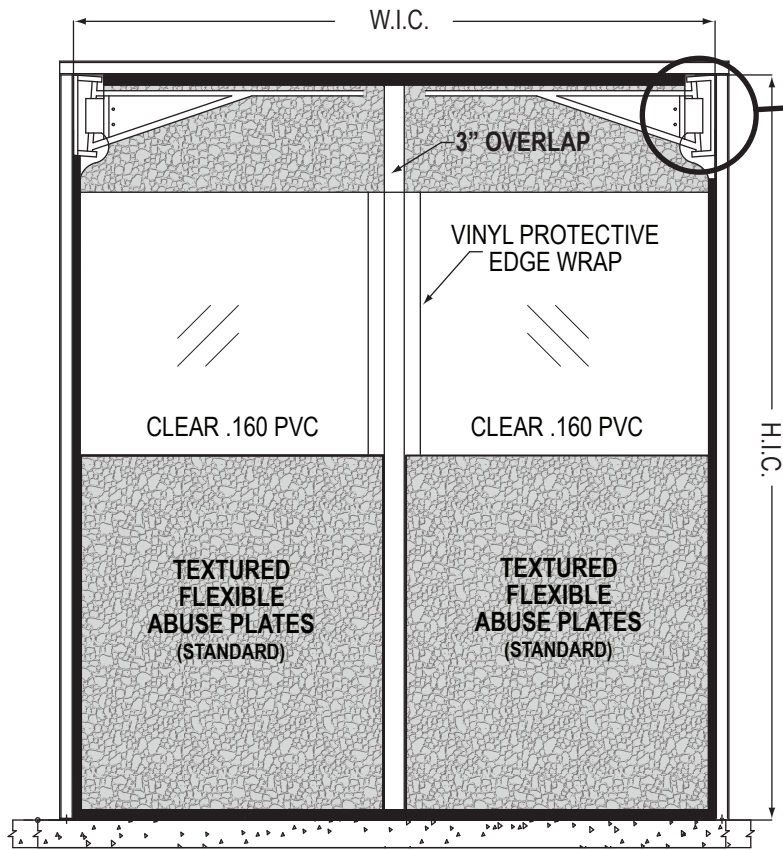

TOP MOUNTED GRAVITY HINGE

Doors to be constructed from a base layer of .160 Clear P.V.C.

Standard features are:

- Top mounted gravity hinges.
- Full Perimeter Seal.
- Reinforced Leading Edge.
- Textured P.V.C.
- Not for Freezers.



DOOR SPECIFICATION

Opening Width _____ x Height _____

Qty. _____

BI-PARTING

SINGLE PANEL

L

R

TEXTURED P.V.C. COLOR OPTIONS

BLACK

BLUE

BROWN

OYSTER GREY

GREEN

OPTIONS FOR AIR PRESSURE

SPRING LOADED HINGES

CLOSING MAGNETS

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

PT - 2200 FLEX DOOR

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. PO ORDER NO.