




Retail • Commercial Application
Personnel to Medium Cart Traffic

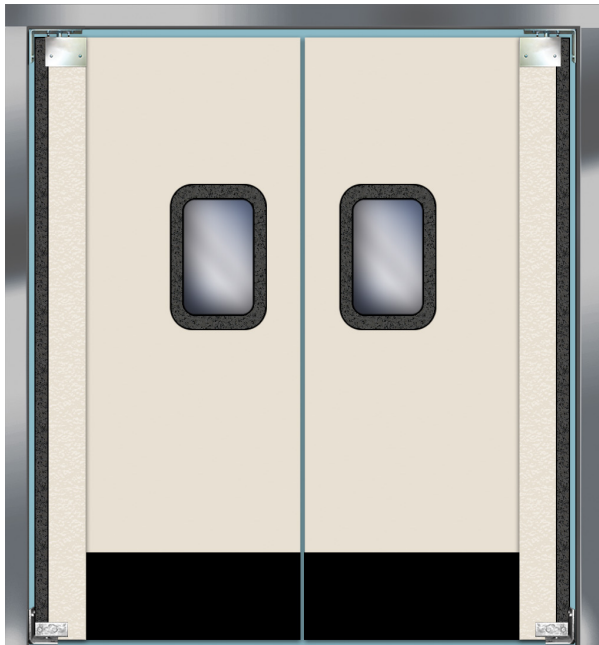

PT- 6000 with optional impact plates.

DOUBLE ACTING TRAFFIC DOOR

- **OVERALL THICKNESS 1/4"**
- **MEDIUM DUTY**
- **IDEAL TO SEPARATE SALES ROOM FROM STOCK ROOM**
- **EASY TO INSTALL AND MAINTAIN**

Perma Tech Inc. doors are available in single or double panel.

FEATURES:

- Doors are constructed of 1/4" thick ABS plastic sheet.
- Hinge area and back edges are reinforced with a triple layer spine and fiberglass channel.
- Standard windows are 9" x 14" x 1/4" acrylic set in a custom ABS frame.
- Available standard colors are black, white and beige. *Consult factory for specialty colors.*
- Doors can be manufactured to fit up to an 8' x 8' bi-parting opening or 4' x 8' single panel.

Perma Tech Inc.


363 Hamburg Street • Buffalo, NY 14204

Phone: 716.854.0707 • Fax: 716.854.0774

Sales@PermaTechInc.com • www.PermaTechInc.com

ARCHITECTURAL SPECIFICATIONS

Where indicated on plans furnish PT - 6000 double acting, gravity actuated traffic door. Doors are constructed of 1/4" thick ABS plastic sheet. Hinge edge is reinforced with triple layer and fiber-glass panel. Doors come standard with 9" x 14" acrylic vision panel and GS style hinge with hardened cam-plate and rollers, dust covers and bottom pin assembly.

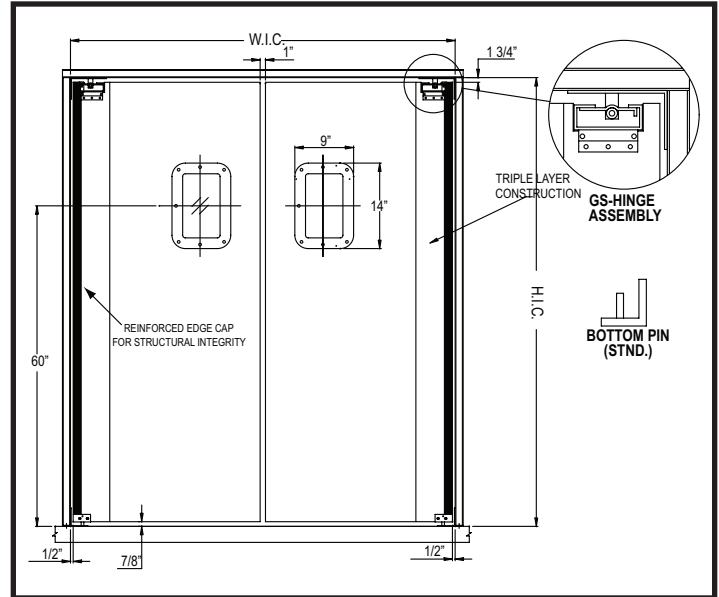

To fit door opening size:

_____ width x _____ height

- Single
- Bi-Parting

OPTIONS:

Impact Plates, Jamb Guards, Rub Rails and Scuff Plates are available as an upgrade.

ABS

- PL 12 (12")
- PL 18 (18")
- PL 24 (24")
- PL 30 (30")
- PL 36 (36")
- PL 42 (42")
- PL 48 (48")

WINDOWS

- 6" x 12"
- 9" x 14" (STND)
- 14" x 16"
- 22" x 22"
- 10" x 30"

HINGE-JAMB GUARD OPTIONS

- Bottom Pin (STD)
- JG 10"
- Stainless Steel

DOOR FRAMES

- Tube Style - Stainless Steel
- Tube Style - Primed Steel
- C-Channel - Primed Steel
- C-Channel - Stainless Steel

OTHER

- Limiting Posts
- Rub Rails / Cart Guards
- Cafe/Gate Style



PT- 6000 Traffic Doors are shipped FOB Factory.

Customer: _____
 Approved By: _____ Date: _____