
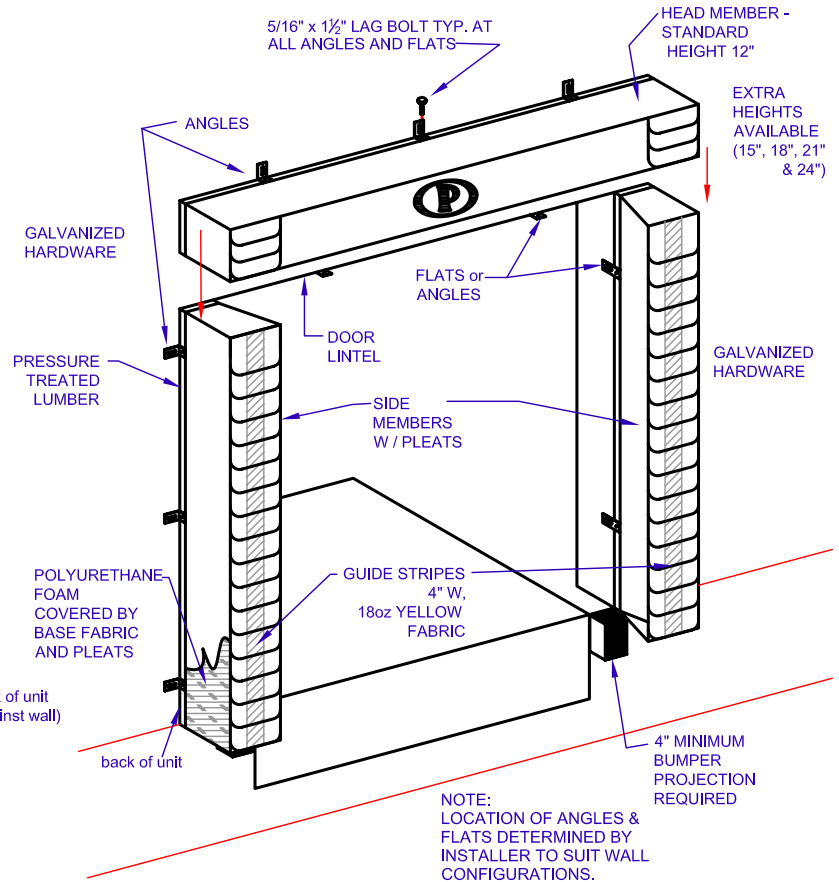
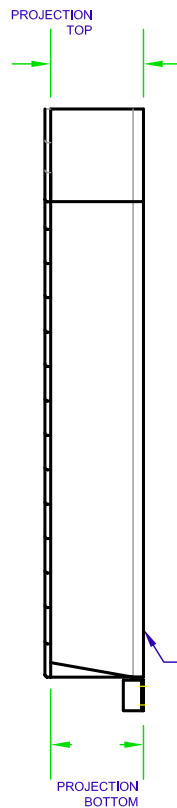



# STATIONARY FOAM HEAD MEMBER (W/ PLEATS) DOCK SEAL SPECIFICATION SHEET

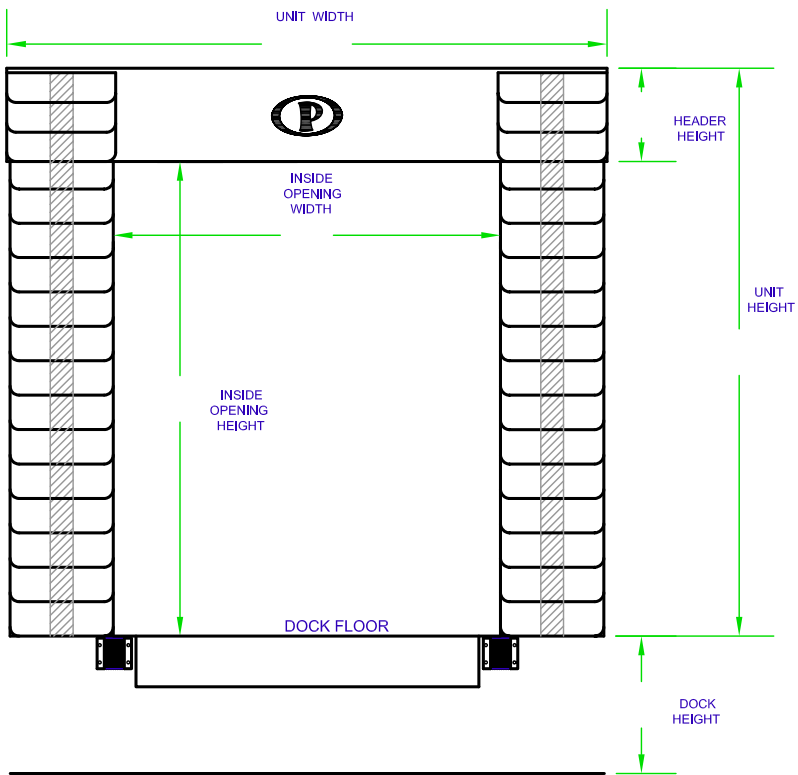


NOTE:  
LOCATION OF ANGLES &  
FLATS DETERMINED BY  
INSTALLER TO SUIT WALL  
CONFIGURATIONS.

### SIDE PAD MOUNTING VARIATIONS: CIRCLE ONE:

ENTER SIDE PAD FACE WIDTH:

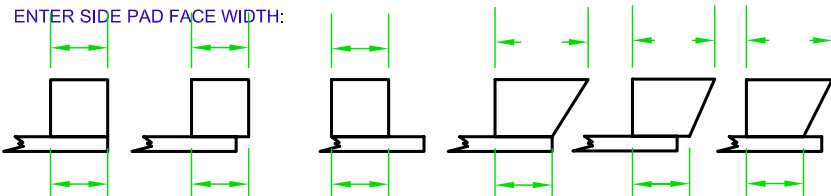

ENTER SIDE PAD BASE WIDTH:

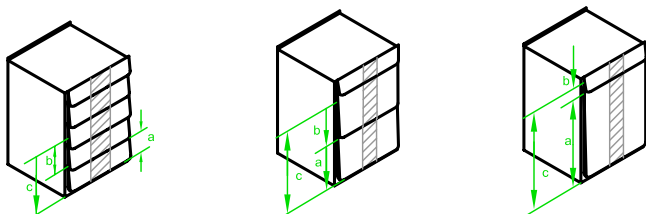

**PP4**  
a. Exposure 4"  
b. Overlap 4"  
c. Total Length 8"

**PP8**  
a. Exposure 8"  
b. Overlap 10"  
c. Total Length 18"

**PP16**  
a. Exposure 16"  
b. Overlap 2"  
c. Total Length 18"

QUANTITY: \_\_\_\_\_, MODEL: \_\_\_\_\_,  
UNIT SIZE: \_\_\_\_\_ WIDTH, \_\_\_\_\_ HEIGHT  
HEAD CURTAIN: \_\_\_\_\_ WIDTH, \_\_\_\_\_ DROP  
INSIDE OPENING WIDTH: \_\_\_\_\_  
INSIDE OPENING HEIGHT: \_\_\_\_\_  
PROJECTION: \_\_\_\_\_ TOP, \_\_\_\_\_ BOTTOM  
SIDE PAD: \_\_\_\_\_ HEIGHT, \_\_\_\_\_ WEDGE  
CHAIN FLAP: \_\_\_\_\_ WIDTH, \_\_\_\_\_ LENGTH  
BASE FABRIC: \_\_\_\_\_, COLOR: \_\_\_\_\_  
FACE FABRIC: \_\_\_\_\_, COLOR: \_\_\_\_\_

DOOR SIZE: \_\_\_\_\_ WIDTH, \_\_\_\_\_ HEIGHT  
DOCK HEIGHT: \_\_\_\_\_, BUMPER PROJECTION: \_\_\_\_\_  
APPROACH:  LEVEL  DECLINE  INCLINE  
\_\_\_\_\_ " DIFFERENCE IN 50'-0"

OPTIONS:  
 VELCRO SLIT: \_\_\_\_\_ HEIGHT.  
 3 ROPE PULL-UP  
 UNIT SUPPORT FRAME:  WOOD  STEEL  
 INSIDE WRAP -  
MATERIAL: \_\_\_\_\_, HEIGHT: \_\_\_\_\_

### SPECIAL INFORMATION

**PERMA TECH, INC.**  
363 HAMBURG STREET • BUFFALO, NY 14204  
(716) 854-0707 • 1-800-DOC-SEAL  
[www.permatechinc.com](http://www.permatechinc.com)

JOB: \_\_\_\_\_

DEALER: \_\_\_\_\_

CONTACT: \_\_\_\_\_

QUOTE #: \_\_\_\_\_

APPROVED BY SIGNATURE: \_\_\_\_\_