

# PERMA FLEX DFPX

## SPECIFICATION SHEET

( EXTRA HEAVY DUTY, SECTIONAL DOOR FLEXIBLE REPLACEMENT PANEL )

40 oz. NEOPRENE NOSING (TOP AND BOTTOM) TABOR ABRASION - 1,000 CYCLES

1/8" FABRIC REINFORCED VINYL FACING (FRONT & BACK)



1-1/2" THICK WOOD SUB-BLOCK (TOP AND BOTTOM)

3"x 1-1/2" ALUMINUM EXTRUSION (BOTH RIGHT AND LEFT SIDES) 11 GAUGE

1-1/2" x 1-1/2" RUBBER EXTRUSION (TOP AND BOTTOM) 1,500 LBS. TENSILE

1-1/2" THICK POLYURETHANE FOAM CORE - 135# I.L.D.

2 DOOR PANELS HINGED TOGETHER

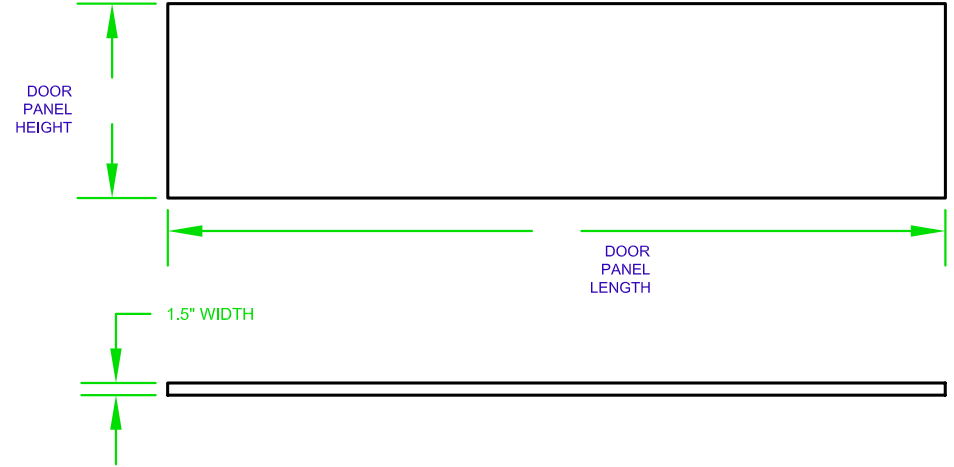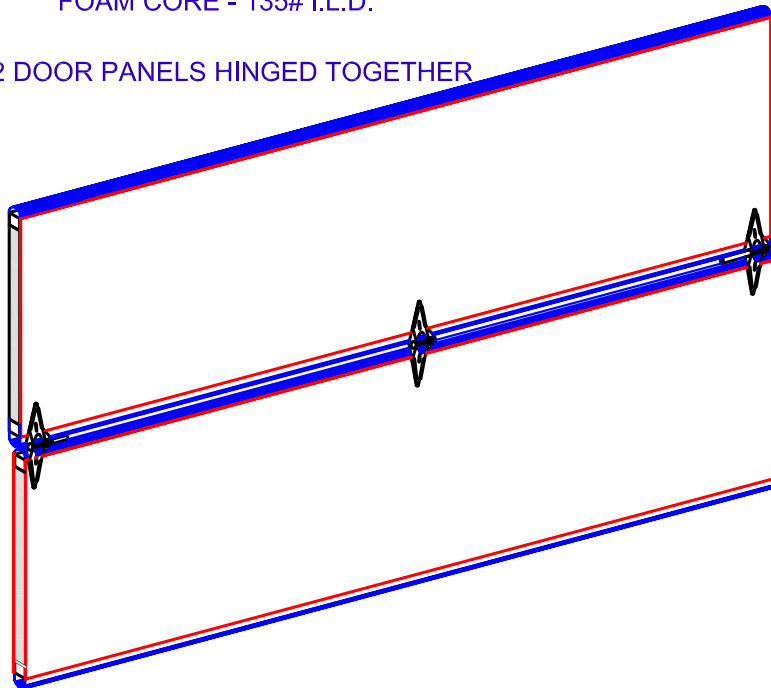

QUANTITY: \_\_\_\_\_

UNIT SIZE: \_\_\_\_\_ WIDTH, \_\_\_\_\_ HEIGHT

INSIDE OPENING WIDTH: \_\_\_\_\_

INSIDE OPENING HEIGHT: \_\_\_\_\_

PROJECTION: \_\_\_\_\_

COLOR: \_\_\_\_\_

DOOR SIZE: \_\_\_\_\_ WIDTH, \_\_\_\_\_ HEIGHT

DOCK HEIGHT: \_\_\_\_\_

BUMPER PROJECTION \_\_\_\_\_

APPROACH:  LEVEL  DECLINE  INCLINE

\_\_\_\_\_ " DIFFERENCE IN 50'-0"

### SPECIAL INFORMATION



**PERMA TECH, INC**

363 HAMBURG STREET • BUFFALO, NY 14204

(716) 854-0707 • 1-800-DOC-SEAL

[www.permatechinc.com](http://www.permatechinc.com)

JOB: \_\_\_\_\_

DEALER: \_\_\_\_\_

CONTACT: \_\_\_\_\_

QUOTE #: \_\_\_\_\_

APPROVED BY SIGNATURE: \_\_\_\_\_