



DOUBLE ACTING "FLEXIBLE" TRAFFIC DOOR



363 Hamburg Street, Buffalo, NY 14204
 Tel: 716-854-0707 Fax: 716-854-0774
 Sales@PermaTechInc.com www.PermaTechInc.com

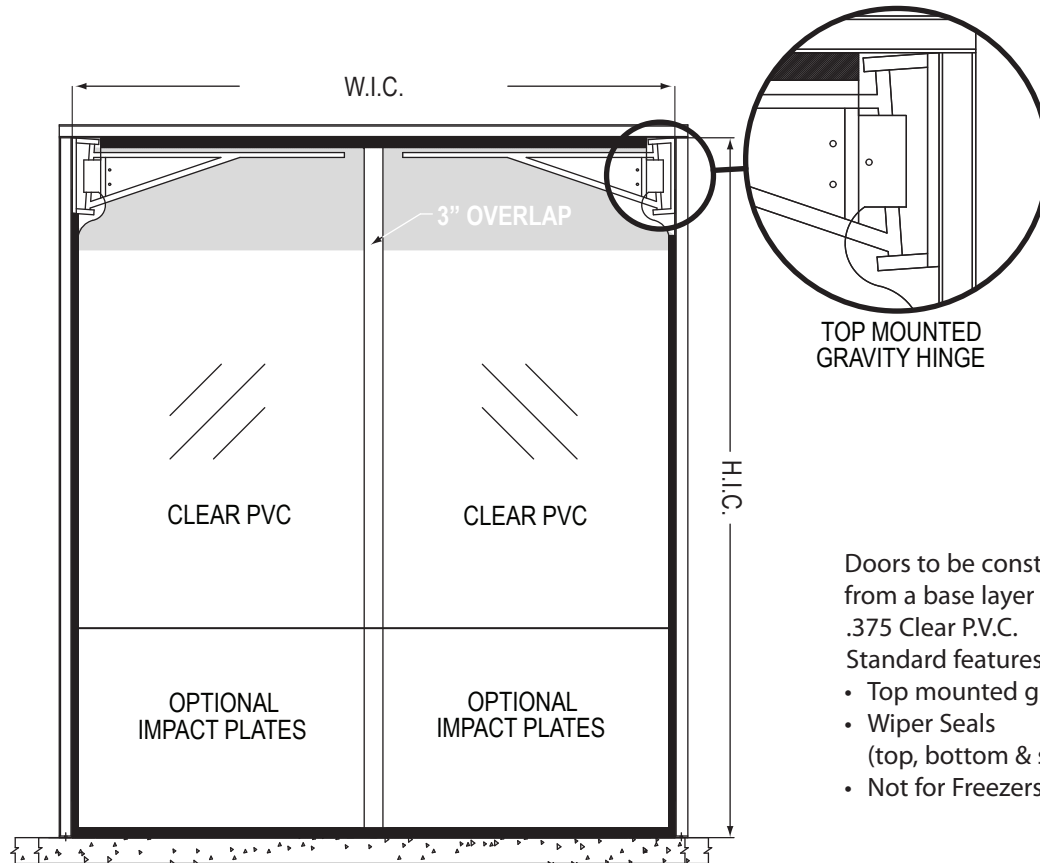

TOP MOUNTED GRAVITY HINGE

Doors to be constructed from a base layer of .250 or .375 Clear P.V.C.
 Standard features are:

- Top mounted gravity hinges.
- Wiper Seals (top, bottom & sides).
- Not for Freezers.

DOOR SPECIFICATION

Opening Width _____ x Height _____

Qty. _____

BI-PARTING

SINGLE PANEL

L

R

DOOR MODEL

240 - BASE LAYER .250 CLEAR P.V.C.

260 - BASE LAYER .375 CLEAR P.V.C.

STANDARD COLORS FOR TRIM AND PLATES

BLACK

GREEN

IMPACT PLATES

CONVEYOR BELT

RIGID IMPACT PLATES WITH SS RIVETS

IMPACT PLATE HEIGHT

12"

24"

36"



48"

OTHER _____

OPTIONS FOR AIR PRESSURE

SPRING LOADED HINGES

CLOSING MAGNETS

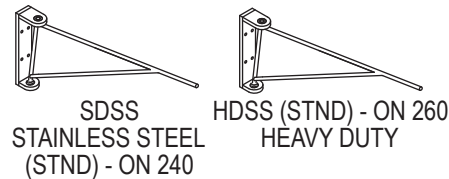

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

PT-2400 or PT- 2600 FLEX DOOR

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. PO ORDER NO.