




Perma Tech Inc.

PERMA UNI-SWING

Specifications: 1-3/4" Insulated Foam Core

IMPORTANT: Provide measurements using the illustration below.

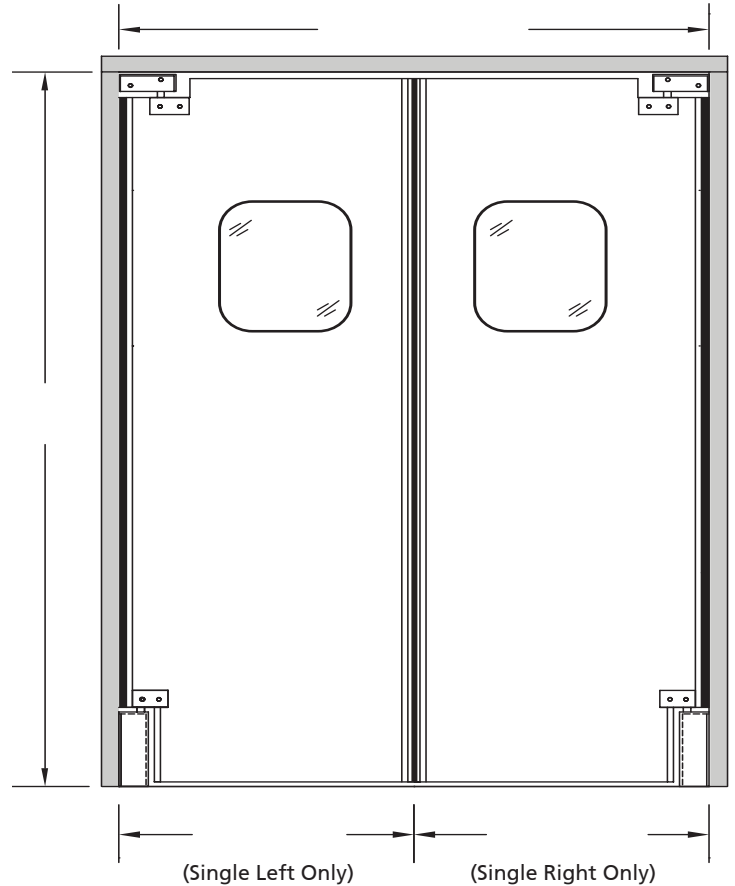

Note: Door Frame (shaded portion) not included.

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

*I have reviewed the specifications and authorize Perma Tech Inc. to begin immediate manufacturing of **PERMA UNI-SWING**. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: _____ Date: _____

Company Name: _____

Phone: _____

SPECIAL OPTIONS / NOTES

Date: _____

PERMA Quote Number: _____

Account Number: _____

Sold To: _____

Address: _____

Purchase Order #: _____

Ship To: _____

Address: _____

Special Markings/Instructions: _____

Quantity: _____ **Single** **Bi-Parting**
**Please check only one.*

Finished Opening: _____" W X _____" H

ABS FACING COLOR SELECTION: (check one)

White (Standard) **Black (Standard)**

Custom ABS Color Options:

Dove Gray Fieldstone Gray Royal Red
Leather Brown Dutch Chocolate Desert Beige
Marine Blue Canyon Blue

DOOR FEATURES & OPTIONS:

Bumpers:	Bumper Size (check one):	
NONE	12" Height	36" Height
Tear-Drop Bumpers Black Polyethylene (standard)	18" Height	42" Height
	24" Height	48" Height

ABS Wear Panel (Enter desired height. Panel will be width of door.)

NONE _____" Height

ABS Wear Panel Color _____
(Enter desired Wear Panel color)

Window Size: Dual Pane set in Black Rubber Molding

NONE **14" x 16" (Standard Size)**
9" x 14" 9" x 30"

Stainless Steel - 20 GA:

Push Plates Kick Plates: 24 inch 36 inch
4" x 12"

FEATURE NOTES:

- FULL PERIMETER GASKETING IS STANDARD
- **JAMB CONSTRUCTION:** EZ Hinge requires a minimum double 2x4 inch wood jamb or equal. Jamb must be square and plumb.
- **JAMB GUARD/HINGE:** EZ Hinge with 8-3/4" High x 3" Deep Jamb Guards (all stainless steel)

Sign Here