

Retail • Commercial Application
Personnel to Light Cart Traffic



PT- 5000 with reinforced spine.

DOUBLE ACTING TRAFFIC DOOR

- **STRUCTURALLY FORMED EDGES**
- **ALUMINUM BODY**
- **REINFORCED JAMB EDGES**
- **EASY TO INSTALL AND MAINTAIN**

Perma Tech Inc. doors are available in single or double panel.

FEATURES:

- Doors are constructed from a sheet of .063 anodized aluminum.
- Standard hinges are GS-style rollers, cam plates, dust covers and bottom pins.
- Standard windows are 9" x 14" x 1/8" polycarbonate set in a custom rubber extrusion.
- Doors can be manufactured to fit up to an 8' x 8' bi-parting or 4' x 8' single panel opening.

Perma Tech Inc.

363 Hamburg Street • Buffalo, NY 14204

Phone: 716.854.0707 • Fax: 716.854.0774

Sales@PermaTechInc.com • www.PermaTechInc.com


ARCHITECTURAL SPECIFICATIONS

PT-5000 doors are constructed from a sheet of .063 gauge anodized aluminum. Leading edges are formed for structural integrity. Jamb edges are reinforced with a 7" wide 3/8" ply-wood clad with .063 anodized aluminum on both sides of the panel. Standard windows are 9" x 14" x 1/8" polycarbonate set in a custom rubber extrusion. Standard hinges are GS style rollers with cam plates, dust covers and bottom pin.

To fit door opening size:

_____ width x _____ height

- Single
- Bi-Parting

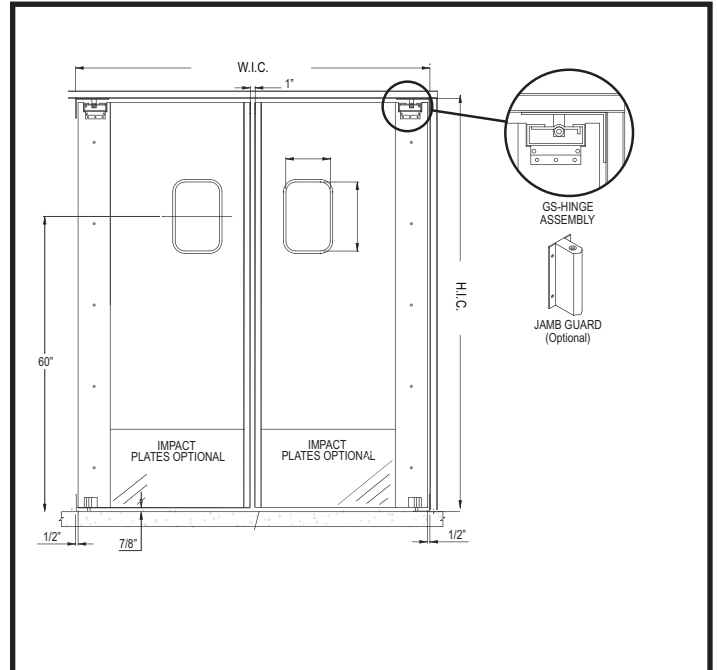

OPTIONS:

The following options are available as an upgrade:

STAINLESS STEEL IMPACT PLATES

- SS12 (12")
- SS12 (18")
- SS24 (24")
- SS30 (30")
- SS36 (36")
- SS42 (42")
- SS48 (48")

PLASTIC IMPACT PLATES

- PL 12 (12")
- PL 24 (24")
- PL 30 (30")
- PL 36 (36")
- PL 42 (42")
- PL 48 (48")

JAMB GUARD OPTIONS

- JG 10"
- SS JG 10"

WINDOWS

- 6" x 12"
- 14" x 16"
- 22" x 22"
- 9" x 14" (STND)
- 10" x 30"



PT- 5000SS Traffic Doors are shipped FOB Factory.

Customer: _____

Approved By: _____ Date: _____