

# **Retail • Food Processing Application**

Heavy Cart to Light Forklift Traffic



PT-8000 shown with optional 18" teardrop bumpers.

## **DOUBLE ACTING "INSULATED" TRAFFIC DOOR**

- 10" JAMB GUARDS (STND)
- INSULATED
- FULL PERIMETER GASKET
- OVERALL THICKNESS 1 3/4"
- MEDIUM DUTY

Perma Tech Inc. doors are available in single or double panel.



## **FEATURES:**

- Doors are constructed from a custom rigid PVC extrusion with thermo-plastic facings.
- Doors are fully insulated 1 3/4" thick panels.
- Hinges are V-CAM assembly for Model 8000 V or GS-style rollers for Model 8000.
- Standard windows are 9" x 14" x 1/8" Lexan set in low profile, vacuum formed window frames.
- Available standard colors are black, canyon blue, green, brown, white, beige, dark gray, light gray and red.
- Doors can be manufactured to fit up to an 10' high opening. *Consult factory for larger opening.*

### **Retail • Food Processing Application**

HEAVY CART TO LIGHT MOTORIZED TRAFFIC

### R C Н R L S Ρ Ε С F С 0 E С Т T

Where indicated on plans, furnish PT-8000V or PT-8000 double acting, gravity actuated traffic door to be constructed with rigid structure and insulated core. Overall thickness to be 1 3/4". Windows to be 9" x 14" x 1/8" Lexan set in vacuum formed window frames. Facing to be high impact plastic. Doors to have full perimeter gasket. Hard-ware to be V-CAM assembly with jamb guards or GS-style with CAM plate, dust covers and jamb guards.

### To fit door opening size:

width x height


□ SINGLE □ BI-PARTING □ Left □ Right

### **OPTIONS:**

**Teardrop Bumpers and Impact plates are** available as an upgrade. 10" Jamb Guards (STND). TEARDROP BUMPERS (BOTH SIDES)

		PT - 8000 or PT Customer: Approved By:								
				F - 8000V Traffic Doors are shipped FOB Factory.						
WINDOWS 9″ x 14″ (STND) 14″ x 16″			10″ x 30″ 22″ x 22″	<ul> <li>Stainless Steel Hard</li> <li>SS Jamb Guard - JG</li> <li>Transom Panels For</li> </ul>				0"		
SS30 (30″) SS48 (48″)	□ 2236 (36)	)	🗆 SS42 (42")		Locking Co				Rub Rails	
	🗆 SS18 (18′	-	□ SS24 (24″)		TIONS Limiting Po	sts			Cane Bolts	
IMPACT PLATES (BOTH SIDES) BLACK ABS (STANDARD) PL12 (12") PL18 (18") PL24 (24") PL30 (30") FB36 (36") PL42 (42") FB48 (48")					<ul> <li>DOOR FRAMES</li> <li>Tube Style - Powder Coated Steel</li> <li>Tube Style - Stainless Steel</li> <li>C-Channel - Powder Coated Steel</li> <li>C-Channel - Stainless Steel</li> </ul>					
FB12 (12″) FB30 (30″) FB48 (48″)					BLACK BEIGE DK. GRAY		WHITE GREEN RED		BROWN LT. GRAY CANYON BLUE	

Perma Tech Inc. • 363 Hamburg Street • Buffalo, NY 14204 Sales@PermaTechInc.com • www.PermaTechInc.com

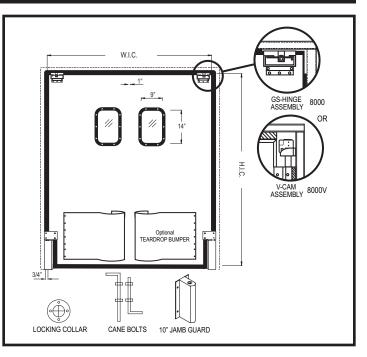

### **HINGE OPTIONS:**

- **GS Hinge = 8000**
- **V-CAM = 8000V**

### **THERMOPLASTIC FACINGS COLOR OPTIONS:**

