


DOUBLE ACTING "INSULATED" TRAFFIC DOOR





363 Hamburg Street, Buffalo, NY 14204


Tel: 716-854-0707

Fax: 716-854-0774

Sales@PermaTechInc.com www.PermaTechInc.com

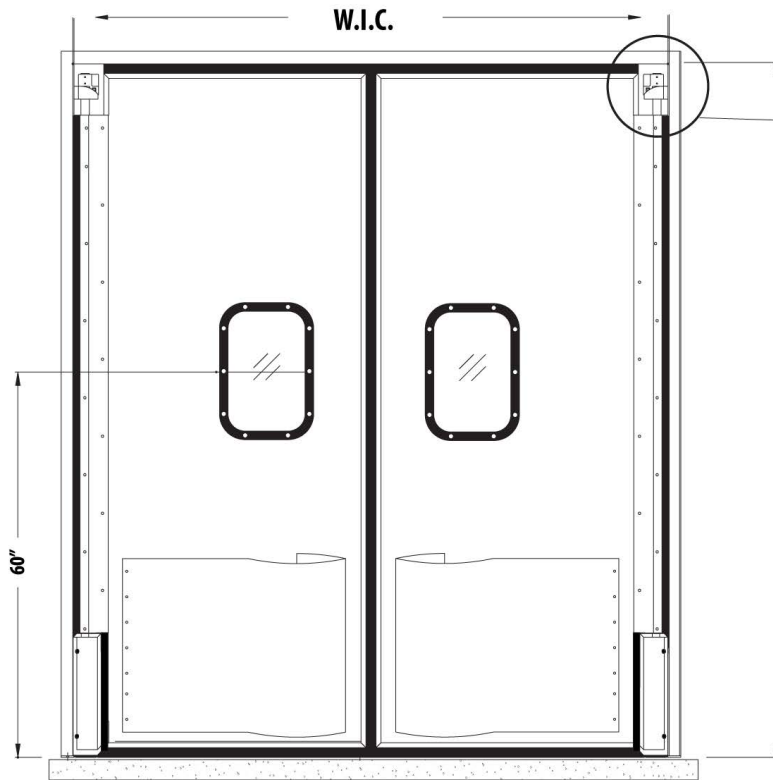

V-CAM ASSEMBLY




10" JAMB GUARD


ASSEMBLY
(OPTIONAL)

Doors to be constructed from a custom rigid P.V.C. extrusion with thermo-plastic facings.


- Standard features are:
- Bottom 10" Jamb Guard.
 - 9"x14" Vacuum formed window frames.
 - Fully insulated, 1 3/4" thick panels.



PLASTIC IMPACT PLATE



CANE BOLTS



FB-TEARDROP BUMPER



LOCKING COLLAR

DOOR SPECIFICATION

Opening Width _____ x Height _____

Quantity _____

BI-PARTING SINGLE PANEL
L R

THERMOPLASTIC FACINGS COLOR OPTIONS

BLACK	WHITE	BROWN
BEIGE	DK.GRAY	GREEN
CANYON BLUE	LT.GRAY	

TEARDROP BUMPERS (BLACK HDPE STANDARD)

FB12"	FB18"	FB24"	FB30"
FB36"	FB42"	FB48"	

IMPACT PLATES (BLACK ABS STANDARD)

PL12"	PL18"	PL24"	
PL30"	PL36"	PL42"	PL48"

WINDOW SIZES

10"x30"	9"x14" (STD)
14"x16"	22"x22"

HARDWARE OPTIONS

CANE BOLTS
LOCKING COLLARS
ALL STAINLESS STEEL

PT- 8500

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. P.O. NO.

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____