


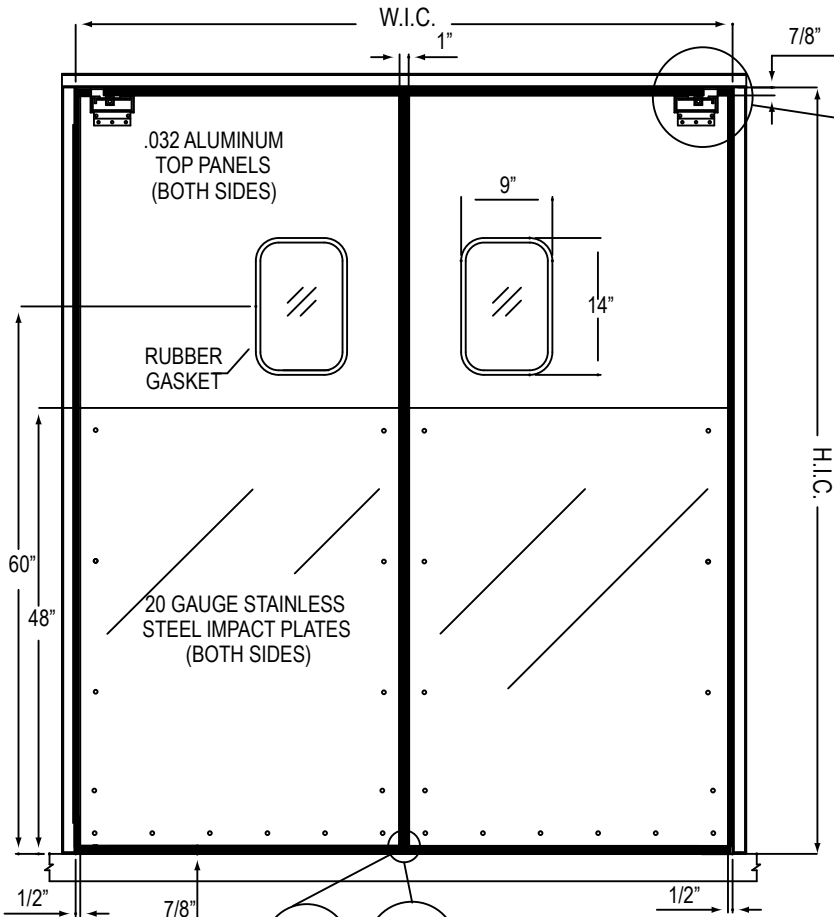




DOUBLE-ACTING RIGID TRAFFIC DOOR



Doors to be constructed of a 3/4" exterior grade solid wood core, 1" total door thickness

- Top Panel:** .032" tempered aluminum alloy with satin anodized finish (both sides)
- Bottom Plate:** 48" high stainless steel
- Window:** 9" x 14" clear acrylic set in black rubber molding



363 Hamburg Street, Buffalo, NY 14204
 Tel: 716-854-0707 Fax: 716-854-0774
 Sales@PermaTechInc.com www.PermaTechInc.com

DOOR SPECIFICATIONS

Opening Width _____ x Height _____
 Qty. _____

BI-PARTING SINGLE PANEL
 L R

TEARDROP BUMPER

FB12"	FB18"	FB24"
FB30"	FB36"	FB42"
FB48"		

EDGE TRIM

STAINLESS STEELCAPS - 9000ALC
 PVC (RIGID) - 9000ALC
 FULL GASKET- 9000ALCG

WINDOW SIZE

9"x14"	14"x16"
22"x22"	10"x30"

HARDWARE OPTIONS

(STANDARD) GS HINGE W/ BOTTOM PIN
 GS HINGE W/ (OPTIONAL) 10" JAMB GUARD
 (OPTIONAL) STAINLESS STEEL GS HINGE
 W/ SS BOTTOM PIN
 (OPTIONAL) STAINLESS STEEL GS HINGE
 W/ SS 10" JAMB GUARD
 (OPTIONAL) STAINLESS STEEL 10" JAMB GUARD
 W/ STANDARD HINGES

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

PT - 9000ALC

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. P.O. NO.